




P.O. Box 787, Station T, Calgary, Alberta T2H 2H9  
 Phone (403) 279-7271 Telex 168510B-25756

# TF-60

6815A - 40th Street S.E., Calgary, Alberta T2C 2W7  
 Phone (403) 279-7271 Telex 03-825756

SUBJECT TO CHANGE WITHOUT NOTICE

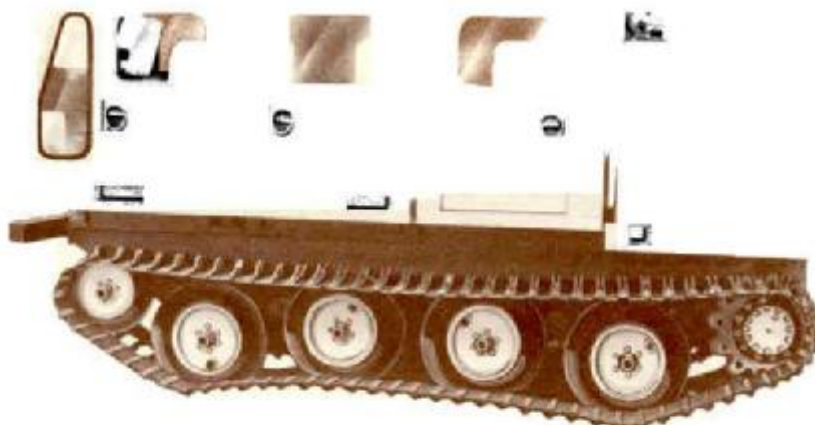

OPTIONAL CREW CAB SHOWN

## PERFORMANCE DATA

Weight - basic vehicle	10400 lbs	4717 kg
Payload	8000 lbs	3628 kg
Gross vehicle weight	18400 lbs	8345 kg
Track area at 6" penetration	8958 sq in	5.78 sq m
Ground pressure - unloaded	1.16 psi	0.08 kg/sq cm
Ground pressure at GVW	2.05 psi	0.14 kg/sq cm
Overall width	96 in	244 cm
Width - tracks removed	84 in	213 cm
Overall height	98 in	249 cm
Overall length	196 in	498 cm
Maximum speed	12.2 mph	19.5 km/h
Ground clearance	15 in	38 cm
Turning radius - inside	104 in	264 cm
Fording depth	42 in	107 cm
Climbing ability - grade	60%	
Sidehill ability - grade	40%	

## SPRUNG SUSPENSION VERSION MODEL TF-60S

All features as for Model TF-60 except:  
 Engine - Detroit Diesel 4-53  
 Transmission - Spicer CM5052-B  
 \*Auxiliary Transmission - Rockwell 223  
 Overall Length - 202 in (513 cm)

\*FOR HIGH SPEED VERSION (UP TO 20 MPH-32 KM/H)

## MISCELLANEOUS STANDARD EQUIPMENT

Front Bumper	Special Tools
Pintle Hook	Antifreeze
Maintenance & Parts Manual	Removeable Under Pans

## POWER TRAIN

<b>Engine</b>	Ford 300 CID - 6 cylinder, industrial, gasoline
<b>Transmission</b>	New Process 435L - 1 reverse & 4 forward gears
<b>Clutch</b>	13" single plate, hydraulic control
<b>Final Drive</b>	Controlled differential (5.85:1) with oil cooling reservoir. Outer planetaries (3.1:1)
<b>Brakes</b>	Drive line parking brake, hydraulic power steering brakes at differential

## GENERAL SPECIFICATIONS


<b>Steering</b>	Lever controlled - hydraulic
<b>Electrical</b>	Alternator—45 amp 12 volt Battery—90 amp/hr H.D.
<b>Suspension</b>	Walking beams, replaceable wear bushings
<b>Load wheels</b>	Rims 16 x 5.50—6 Stud—2 pc rim Tires 6.00—16 x 10 PR—smooth
<b>Tracks</b>	Rubber belts (PN200) and spring steel, drop centre grousers
<b>Sprockets</b>	Steel with replaceable urethane drive elements
<b>Elevated front idlers</b>	Solid rubber
<b>Cab</b>	Two-man, steel, roll-down windows, escape hatch, dome head and panel lights, windshield wipers, heaters and defrosters, lined and insulated
<b>Fuel</b>	Saddle tanks, 2 x 60 Imp. gallons (545 litres)
<b>Instruments</b>	Engine oil pressure, coolant temperature and fuel gauges; hourmeter and tachometer, ammeter
<b>Color</b>	Standard—International Orange or customer choice (single color)

## OPTIONS AVAILABLE

Options Available: include alternate engines and transmissions, tilt cabs, 5-man crew and personnel bodies, Tundra tracks, load decks in various widths and lengths, grill guards, front and/or rear winches.

## DEALER STAMP

# TF-60

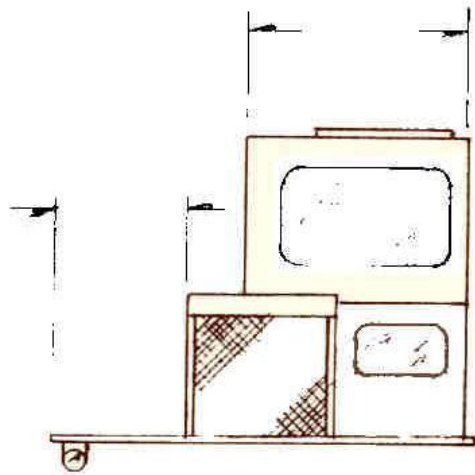

OPTIONAL ONE-MAN CAB  
AND SIDE DECK

